


FILE COPY

DO NOT SCALE

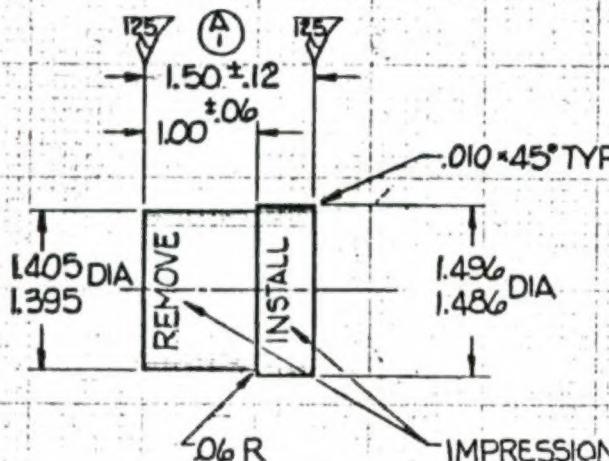

(A) (2) (3)

NOTES:

1. IDENTIFY PER HP 8-5 (IMPRESSION STAMP)
2. ANODIZE PER HP 4-2

269A\9280

KIT

A

REVISIONS

SYM	E.O.'S	DESCRIPTION	DRWN	APP'D	DATE
A		RELEASES S.O. #1	RGB		6-8-2

(A)

REQD	PART NO.	REQD	PART NO.	NAME	SIZE	DESCRIPTION	SPECIFICATION
ASSEMBLY OPP.							
				UNLESS OTHERWISE SPECIFIED			
				DIMENSIONAL TOLERANCES			
				3 PLACE DECIMAL ± .010			
				2 PLACE DECIMAL ± .03			
				ANGULAR ± 0°30'			
				DIMENSIONS TO BE MET BEFORE PLATING.			
				CORNER RADIUS .062 ON C BORES AND SPOT FACES OF 1.250 DIA. OR LESS — .093 RADIUS ON GREATER THAN 1.250 DIA.			
NEXT ASSY	USED ON	NEXT ASSY	FINAL ASSY				
APPLICATION	QTY REQD						

PUNCH-
71B7512 SEAL
INSTALL

HUGHES TOOL COMPANY
AIRCRAFT DIVISION
CULVER CITY, CALIFORNIA



269A\9280
CODE 02731 SHEET 1 OF 1